

Dormont  **GAS CONNECTORS**
MANUFACTURING COMPANY

The Superior Stainless Steel Connector

Dormont Supr-Safe® Stainless Steel Connectors are trusted worldwide for our proven performance, superior quality and exclusive design features. Our proprietary manufacturing process enables us to provide the safest, longest lasting gas connectors. With our No-Neck® design, greater flexibility and superior appearance, Dormont has become the leading gas connector brand worldwide!


Exclusive Dormont No-Neck® Design

With ordinary connectors, the tubing's straight neck enters the nut, and after being subjected to repeated flexing, can develop stress cracks that can result in a gas leak.

The Supr-Safe® No-Neck® design eliminates this danger because the first few tubing corrugations are enclosed within the nut. Result: increased tubing flexibility and longer normal service life.



**5/8" OD (1/2" ID)
Range Connectors**

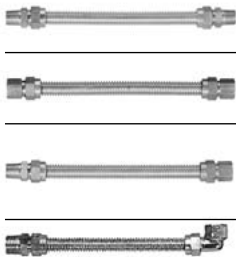


Description	Part No.
3/4" MIP x 3/4" MIP	30-4141
1/2" MIP x 3/4" NIP	30-3141
1/2" MIP x 1/2" MIP	30-3131
3/4" FIP x 3/4" FIP	30-4242
1/2" FIP x 3/4" FIP	30-3242
1/2" FIP x 1/2" FIP	30-3232
1/2" MIP x 1/2" FIP	30-3132
1/2" MIP x 3/4" FIP	30-3142
3/4" MIP x 1/2" FIP	30-4132
3/4" MIP x 3/4" FIP	30-4142
3/4" MIP x 3/4" FIP (Elbow)	30-4144

Temperature Rating of Connectors with Fittings = Maximum 800° F
Length (When ordering, add length after the part number 12", 18", 24", 30", 36", 48", 60", 72")



**1/2" OD (3/8" ID)
Dryer Connectors**




Description	Part No.
3/8" MIP x 3/8" MIP	20-2121
1/2" MIP x 1/2" NIP	20-3131
3/8" MIP x 1/2" MIP	20-2131
3/8" FIP x 3/8" FIP	20-2222
1/2" FIP x 1/2" FIP	20-3232
3/8" FIP x 1/2" FIP	20-2232
3/8" MIP x 3/8" FIP	20-2122
3/8" MIP x 1/2" FIP	20-2132
1/2" MIP x 3/8" FIP	20-3122
1/2" MIP x 1/2" FIP	20-3132

Length (When ordering, add length after the part number 12", 18", 24", 30", 36", 48", 60", 72")



**3/8" OD (1/4" ID) Water
Heater, Gas Log, Space
Heater Connectors**




Description	Part No.
1/2" MIP x 1/2" MIP	10-3131
3/8" MIP x 1/2" NIP	10-2131
3/8" MIP x 3/8" MIP	10-2121
1/2" FIP x 1/2" FIP	10-3232
3/8" FIP x 1/2" FIP	10-2232
3/8" FIP x 3/8" FIP	10-2222
3/8" MIP x 3/8" FIP	10-2122
3/8" MIP x 1/2" FIP	10-2132
1/2" MIP x 3/8" FIP	10-3122
1/2" MIP x 1/2" FIP	10-3132

Temperature Rating of Connectors with Fittings = Maximum 800° F
Length (When ordering, add length after the part number 12", 18", 24", 30", 36", 48", 60", 72")



**Stainless Steel 15 PSIG
LP-Gas Connector**


**5/8" OD Propane Connector
(Less Adapters) Part No. 31P-7777-**


**5/8" OD Propane Connector
(1/2" MIP x 1/2" FIP) Part No. 31P-31P32P-**

Part No.	Length (When ordering, add length after the part number)				
	22"	34"	46"	58"	70"
31P-7777	22"	34"	46"	58"	70"
31P-31P32P	24"	36"	48"	60"	72"

Dormont **GAS CONNECTORS**

Special Application Gas Connectors



1" OD (3/4" ID) with 3/4" Fittings M x F



Part No. 40-4142



Part No. 41-4142
(with PVC Coating)

Length (When ordering, add length after the part number 24", 30", 36", 48", 60", 72")



1-1/4" OD (1" ID) with 1" Fittings M x F



Part No. 50-5142



Part No. 51-5142
(with PVC Coating)

Length (When ordering, add length after the part number 24", 30", 36", 48", 60", 72")



1-1/2" OD (1-1/4" ID) with 1-1/4" Fittings M x F



Part No. 60-6142



Part No. 61-6142
(with PVC Coating)

Length (When ordering, add length after the part number 24", 30", 36", 48", 60", 72")

Gas Fittings



Range 30 Series (Fittings for 5/8" OD Connectors)



Part No.	Description
90-3031	5/8" OD Flare (15/16" - 16 thread) x 1/2" MIP (Tapped 3/8" FIP)
90-3041	5/8" OD Flare (15/16" - 16 thread) x 3/4" MIP (Tapped 1/2" FIP)
90-3032	5/8" OD Flare (15/16" - 16 thread) x 1/2" FIP
90-3042	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP
95-3042	5/8" OD Flare (15/16" - 16 thread) x 3/4" FIP Elbow



Dryer 20 Series (Fittings for 1/2" OD Connectors)



Part No.	Description
90-2021	1/2" OD Flare x 3/8" MIP (Tapped 1/4" FIP)
90-2031	1/2" OD Flare x 1/2" MIP (Tapped 3/8" FIP)
90-2041	1/2" OD Flare x 3/4" MIP (Tapped 1/2" FIP)
90-2022	1/2" OD Flare x 3/8" FIP
90-2032	1/2" OD Flare x 1/2" FIP
90-2042	1/2" OD Flare x 3/4" FIP



Water Heater, Gas Log & Space Heater 10 Series (Fittings for 3/8" OD Connectors)



Part No.	Description
90-1021	3/8" OD Flare x 3/8" MIP (Tapped 1/4" FIP)
90-1031	3/8" OD Flare x 1/2" MIP (Tapped 3/8" FIP)
90-1022	3/8" OD Flare x 3/8" FIP
90-1032	3/8" OD Flare x 1/2" FIP
95-1021	3/8" OD Flare x 3/8" MIP Elbow
95-1031	3/8" OD Flare x 1/2" MIP Elbow

Special Application Gas Connector Fittings



Fittings for 1" OD Connectors



Part No.	Description
90-4041	1" OD Flare x 3/4" MIP (Tapped 1/2" FIP)
90-4042	1" OD Flare x 3/4" FIP



Fittings for 1-1/4" OD Connectors



Part No.	Description
90-5051	1-1/4" OD Flare x 1" MIP (Tapped 3/4" FIP)
90-5052	1-1/4" OD Flare x 1" FIP



Fittings for 1-1/2" OD Connectors



Part No.	Description
90-6061	1-1/2" OD Flare x 1-1/4" MIP (Tapped 1" FIP)
90-6062	1-1/2" OD Flare x 1-1/4" FIP

Dormont  **GAS CONNECTORS**
MANUFACTURING COMPANY



Fuel Gas Outlet Connection
MODEL 961 For Indoor and Outdoor Installations

Features:

- Easy and safe operation. When the manual valve is in the closed (OFF) position, to make a connection, the user simply pushes back the locking sleeve, inserts the appliance connector plug, and releases the sleeve. No tools are required for a leak-tight connection.
- Gas flows when the manual valve handle is turned to the open (ON) position. An interlocking safety cam prevents release of the appliance connector plug until the manual valve handle is in the closed (OFF) position.
- Tested and Certified by CSA International to AGA #7-90.
- Capacity—42,000 BTU/HR. minimum at 0.3" w.c. pressure drop; .64 s.g. natural gas.
- Natural Fuel Gas Code Reference 5.5.6.
- Temperature Protected—Built-in thermal protection prevents gas flow if the gas connection is exposed to temperatures in excess of 200°F.
- To be used with Natural or Propane Gas.

Fuel Gas Outlet

Part No.	Connector ID
961-2234	Model 961 Fuel Gas Outlet Connection with 1/2" NPT (F) 90 deg. inlet and plug with 3/8" NPT (F) outlet
961-3422C	Model 961 Fuel Gas Outlet Connection with 1/2" NPT (F) 90 deg. inlet coupler
961-2122N	Model 961 Fuel Gas Outlet 3/8" NPT (F) plug
961-2021N	Model 961 Fuel Gas Outlet 1/2" OD (M) flare plug

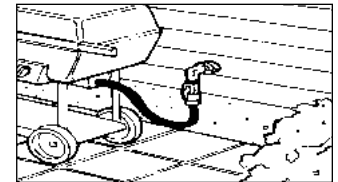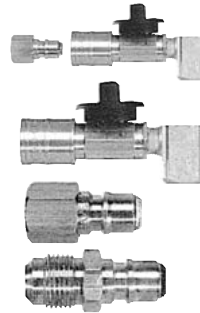

Patents and patents pending

Full-Line Commercial Plumbing Supplier


Commercial Foodservice Quick Disconnect Gas Connectors

Dormont Manufacturing invented the quick disconnect gas appliance connection for the foodservice industry. We authored the ANSI Z21.69 standard and have continued to lead the industry with innovative new connection systems.

Dormont - The Brand of Choice!

Dormont Commercial Gas Connectors are specified and recommended by nearly every major foodservice chain and equipment manufacturer. Dormont commercial gas connectors are The Brand of Choice! And now you can offer Dormont foodservice connectors to your customers for their commercial applications.

Dormont Supr-Safe® gas appliance connectors are the highest quality, safest, longest-lasting gas connectors available. Dormont's commercial stainless steel connectors are available with a stainless steel braid for strength and are available with PVC coating and a quick disconnect (for easy clean-up).

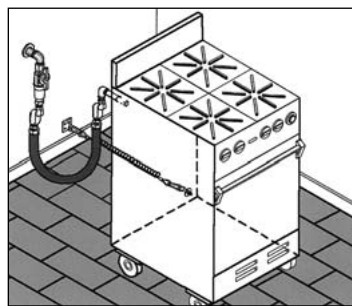

Double Swivel Cimfast Commercial Gas Range Installation

Dormont Multi-Plane Supr-Swivel™ Fitting

The Supr-Swivel™ dramatically increases the connector's range of movement and flexibility, thereby extending its service life.



Patented

Cimfast™ QDV Safety Fitting

Cimfast, the first and only quick disconnect-valve combination design that meets the safety and operational needs of commercial kitchens.



Patented